

# FORCE MEASUREMENT

Industry | Laboratory | Quality Assurance



# SAUTER Pictograms

 <b>Adjusting program (CAL)</b> For quick setting of the instrument's accuracy. External adjusting weight required	 <b>Data interface USB</b> To connect the measuring instrument to a printer, PC or other peripheral devices	 <b>KERN Communication Protocol (KCP)</b> It is a standardized interface command set for KERN balances and other instruments, which allows retrieving and controlling all relevant parameters and functions of the device. KERN devices featuring KCP are thus easily integrated with computers, industrial controllers and other digital systems	 <b>Motorised drive</b> The mechanical movement is carried out by an electric motor
 <b>Calibration block</b> Standard for adjusting or correcting the measuring device	 <b>Bluetooth* data interface</b> To transfer data from the balance/measuring instrument to a printer, PC or other peripherals		 <b>Motorised drive</b> The mechanical movement is carried out by a synchronous motor (stepper)
 <b>Peak hold function</b> Capturing a peak value within a measuring process	 <b>WIFI data interface</b> To transfer data from the balance/measuring instrument to a printer, PC or other peripherals	 <b>GLP/ISO record keeping</b> of measurement data with date, time and serial number. Only with SAUTER printers	 <b>Fast-Move</b> The total length of travel can be covered by a single lever movement
 <b>Scan mode</b> Continuous capture and display of measurements	 <b>Data interface infrared</b> To transfer data from the measuring instrument to a printer, PC or other peripheral devices	 <b>Measuring units</b> Weighing units can be switched to e.g. non-metric. Please refer to website for more details	 <b>Conformity assessment</b> Models with type approval for construction of verifiable systems
 <b>Push and Pull</b> The measuring device can capture tension and compression forces	 <b>Control outputs (optocoupler, digital I/O)</b> To connect relays, signal lamps, valves, etc.	 <b>Measuring with tolerance range (limit-setting function)</b> Upper and lower limiting can be programmed individually. The process is supported by an audible or visual signal, see the relevant model	 <b>DAKkS calibration possible</b> The time required for DAKkS calibration is shown in days in the pictogram
 <b>Length measurement</b> Captures the geometric dimensions of a test object or the movement during a test process	 <b>Analogue interface</b> To connect a suitable peripheral device for analogue processing of the measurements	 <b>Protection against dust and water splashes IPxx</b> The type of protection is shown in the pictogram cf. DIN EN 60529:2000-09, IEC 60529:1989 +A1:1999+A2:2013	 <b>Factory calibration (ISO)</b> The time required for factory calibration is specified in the pictogram
 <b>Focus function</b> Increases the measuring accuracy of a device within a defined measuring range	 <b>Analogue output</b> For output of an electrical signal depending on the load (e.g. voltage 0 V – 10 V or current 4 mA – 20 mA)	 <b>Battery operation</b> Ready for battery operation. The battery type is specified for each device.	 <b>Package shipment</b> The time required for internal shipping preparations is shown in days in the pictogram
 <b>Internal memory</b> To save measurements in the device memory	 <b>Statistics</b> Using the saved values, the device calculates statistical data, such as average value, standard deviation etc.	 <b>ZERO</b> Resets the display to “0”	 <b>Pallet shipment</b> The time required for internal shipping preparations is shown in days in the pictogram
 <b>Data interface RS-232</b> Bidirectional, for connection of printer and PC	 <b>PC Software</b> To transfer the measurement data from the device to a PC	 <b>Rechargeable battery pack</b> Rechargeable set	
 <b>Profibus</b> For transmitting data, e.g. between scales, measuring cells, controllers and peripheral devices over long distances. Suitable for safe, fast, fault-tolerant data transmission. Less susceptible to magnetic interference	 <b>Printer</b> A printer can be connected to the device to print out the measurement data	 <b>Integrated power supply unit</b> Integrated, 230V/50Hz in EU. More standards e.g. GB, AUS or US on request	
 <b>Profinet</b> Enables efficient data exchange between decentralised peripheral devices (balances, measuring cells, measuring instruments etc.) and a control unit (controller). Especially advantageous when exchanging complex measured values, device, diagnostic and process information. Savings potential through shorter commissioning times and device integration possible	 <b>Network interface</b> For connecting the scale/measuring instrument to an Ethernet network		

\*The *Bluetooth®* word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by KERN & SOHN GmbH is under license. Other trademarks and trade names are those of their respective owners.

## SAUTER Models A-Z

281/285	6
283	7
287/289	5

### A

AE 500	34
AFH FAST	35
AFH FD/AFH LD	36
AFI 2.0	37

### C

CB	92
CE HSx	84
CE WT	85
CJ	96
CK	90
CP	88-89
CR	91
CT	93
CS	94-95
CW	98-100

### D

DA	41
DB	42
DC Y1 · DC Y2	87

### F

FA	8
FC	10
FC 1K-BT	21
FG	20
FH-M	13
FH-S	12
FK	9
FL-M	15
FL-S	14
FS	16-17
FS Set	18-19

### H

HB	60
HD	61
HE	58
HK-D/-DB	64
HMM/-NP	65
HMO	67
HN-D	66
HO	70-71

### J

JCS	80-81
JCT	48
JIT	78

### L

LB	39
----	----

### S

S71	24
SD-M	32
SO	73
SP	74
SU	75
SW	76-77

### T

TB	44
TB-US	50
TC	45
TD-US	51
TE	46
TF/TG	47
TI	62
TI-HE	59
TN-EE	54
TN-GOLD	52
TN-US	53
TO-EE	56
TU-US	55
TVL/-E/-O/XLS	22
TVM-N/-NL/-LB	28-29
TVO	25
TVO-S/-LD	26-27
TVP/-L	23
TVS/-LD	30-31

### Y

YKV	83
-----	----

## SAUTER Customer Consultants

With questions about our products and services, we will be happy to advise you:

### Product Specialist Measuring Technology



**Irmgard Russo**  
Tel. +49 7433 9933-208  
info.sauter@kern-sohn.com

### PL, LV, LT, EE, SK, CZ, HU



**Mark Hauder**  
Tel. +49 7433 9933-310  
Mobil +49 160 3378426  
mark.hauder@kern-sohn.com

### Product Specialist Measuring Technology



**Helga Biselli**  
Tel. +49 7433 9933-188  
info.sauter@kern-sohn.com

### SL, HR, AL, MK, BG, BA, ME, RO, GR, CY, GUS



**Ariana Sevcenco**  
Tel. +49 7433 9933-203  
Mobil +49 151 72434692  
ariana.sevcenco@kern-sohn.com

### Product Specialist Measuring Technology



**Andreas Vossler**  
Tel. +49 7433 9933-243  
info.sauter@kern-sohn.com

### North America, Africa, Asia, Middle East, Oceania, TR



**Corinna Matthes**  
Tel. +49 7433 9933-215  
Mobil +49 151 44568364  
corinna.matthes@kern-sohn.com

### UK, BE, IRE, IS, LUX, NL



**Maren Neff**  
Tel. +49 7433 9933-132  
Mobil +49 151 46143240  
maren.neff@kern-sohn.com

### Category Manager Industrial Measuring Technology



**Michael Stingel**  
Tel. +49 7433 9933-293  
michael.stingel@kern-sohn.com

### Sales & Marketing Manager



**Stephan Ade**  
Tel. +49 7433 9933-121  
Mobil +49 171 3060086  
ade@kern-sohn.com

## SAUTER Hotlines



Technical questions about our products?

You will find assistance here quickly: +49 7433 9933- ...

### Service Hotline

for general technical questions about your SAUTER product

→ 199

### SAUTER Measuring Instruments

for all technical questions concerning our SAUTER measuring instruments, test benches, force measuring accessories (clamps etc.), SAUTER software

→ 555

### Industrial Scales

for all technical questions concerning our basic scales (laboratory & industry), pocket balances, school balances, bench scales, price-computing scales, platform scales, counting scales, counting systems, floor scales, pallet truck scales, crane scales, veterinary scales

→ 333

### System Solutions Industry 4.0

for all technical questions concerning the interlocking of the latest information and communication technology with our scales, load cells and measuring devices as well as questions about KERN software


→ 200



SAUTER 289



SAUTER 287

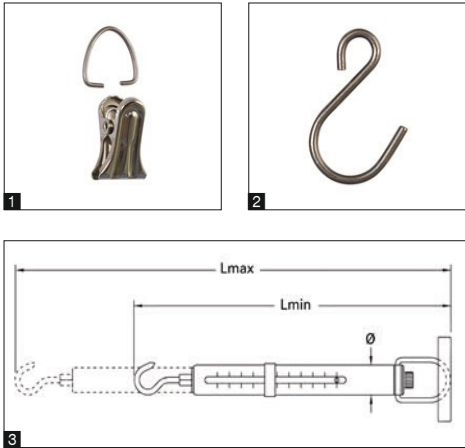

Mechanical weight and force measurement with quality spring for long service life

Features

- The very best price/performance ratio thanks to the transparent plastic housing, ideal for schools and educational institutions
- Newton scale: The SAUTER 289 range can display the results in Newtons instead of in grammes, specifically for measuring tensile forces
- Double scale: For fast or precise recording of the measurement result
- Backlash-free spring bearing with integrated tare screw for highly-precise adjustment
- Non-fatigue stainless steel spring

- Abrasion-resistant, colour precision scale with high resolution
- Thanks to the rotating inner tube, the scale is always easy to read
- The bracket which is delivered as standard can easily be swapped for another suspension device, so that the system can be individually adapted to the items being weighed

Technical data

- Measuring precision:  $\pm 0,3\%$  of [Max]
- Tare range: 20 % of [Max]

Accessories

- **1** Bracket for spring balances of 10 – 1000 g / 0,1 – 10 N, SAUTER 287-A01, **€ 28,-**
- **2** Hook for spring balances 10 – 1000 g/0,1 – 10 N, SAUTER 287-A02, **€ 28,-**

STANDARD

OPTION

1 DAY

+4 DAYS

Model	Measuring range [Max]	Division [d]	Load support	3 Dimensions			Price excl. of VAT ex works €	Option	
				Lmin	Lmax	Ø		Factory calibration certificate	
SAUTER	N	N		mm	mm	mm	€	KERN	€
289-100	1	0,01   0,05	Hook	230	335	12,2	81,-	961-1610	187,-
289-102	5	0,05   0,5	Hook	230	335	12,2	81,-	961-1610	187,-
289-104	10	0,1   0,5	Hook	235	335	12,2	92,-	961-1610	187,-

Model	Weighing range [Max]	Division [d]	Load support	3 Dimensions			Price excl. of VAT ex works €	Option	
				Lmin	Lmax	Ø		Factory calibration certificate	
SAUTER	g	g		mm	mm	mm	€	KERN	€
287-100	10	0,1	Clip	225	330	12,2	84,-	961-100	99,-
287-102	20	0,2	Clip	225	330	12,2	82,-	961-100	99,-
287-104	50	0,5	Clip	225	330	12,2	82,-	961-100	99,-
287-106	100	1	Clip	225	330	12,2	82,-	961-100	99,-
287-108	500	5	Clip	225	330	12,2	82,-	961-100	99,-
287-110	1000	10	Clip	225	330	12,2	92,-	961-100	99,-




SAUTER 281



SAUTER 285



1




2



3



4

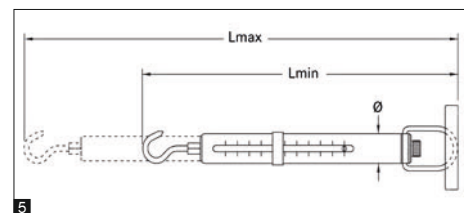

5

## Precise, mechanical spring balances in robust aluminium housing with g/kg readout

### Features

- Aluminium scale tube: robust, long service life, handy
- Gram/Kilogram scale: Measuring result display in grams/kilograms instead of N
- Double scale: For fast or precise recording of the measurement result
- Compressive force measurement: possible using an optional pressure set, see *accessories*
- Drag pointer and carrying handle: as standard for all models of the SAUTER 285 range
- Thanks to the rotating suspension bow the scale can always be aligned to be at the very best line of sight

- Backlash-free spring bearing with integrated tare screw for highly-precise adjustment
- Non-fatigue stainless steel spring
- Clip loop which can be freely rotated of the lower suspension bracket by 360° for models with [Max] ≤ 1 kg
- High-quality workmanship: Wear-resistant, colour-anodised precision scale with high resolution for accurate readability of the measuring result

### Technical data

- Measuring precision: ± 0,3 % of [Max]
- Tare range: 20 % of [Max]

### Accessories

- 1** Pressure-Set, suitable for models with weighing range < 2,5 kg/25 N, SAUTER 281-890, **€ 85,-**
- 2** Pressure-Set, suitable for models with weighing range ≥ 5 kg/50 N, SAUTER 285-890, **€ 98,-**
- 3** Clip, suitable for models with weighing range ≤ 2,5 kg/25 N, SAUTER 281-151-002, **€ 11,-**
- 4** Drag pointer for spring balances, suitable for models with weighing range < 2,5 kg/25 N, SAUTER 281-051-001, **€ 8,-**
- Drag pointer for spring balances, suitable for models with weighing range ≥ 5 kg/50 N, SAUTER 285-897, **€ 45,-**

STANDARD




OPTION



Model	Weighing range [Max]	Division [d]	Load support	5 Dimensions			Price excl. of VAT ex works €	Option	
				Lmin	Lmax	Ø		Factory calibration certificate	
SAUTER	g	g		mm	mm	mm	€	KERN	€
281-101	10	0,1	Clip	220	300	12	120,-	961-100	99,-
281-151	30	0,25	Clip	220	300	12	105,-	961-100	99,-
281-201	60	0,5	Clip	220	300	12	105,-	961-100	99,-
281-301	100	1	Clip	220	300	12	106,-	961-100	99,-
281-401	300	2	Clip	225	325	12	120,-	961-100	99,-
281-451	600	5	Clip	225	325	12	128,-	961-100	99,-
281-601	1000	10	Clip	225	325	12	145,-	961-100	99,-
281-752	2500	20	Hook	225	325	12	135,-	961-100	99,-
285-052	5000	50	Hook	370	510	32	250,-	961-100	99,-
285-102	10000	100	Hook	370	510	32	265,-	961-101	123,-
285-202	20000	200	Hook	370	510	32	260,-	961-101	123,-
285-352	35000	500	Hook	370	460	32	270,-	961-101	123,-
285-502	50000	500	Hook	370	460	32	320,-	961-101	123,-



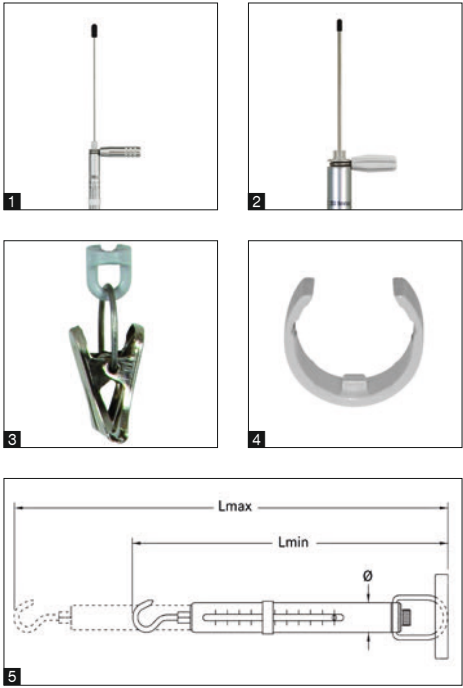

Precise, mechanical force gauge in robust aluminium housing with Newton readout

- Features**
- Aluminium scale tube: robust, long service life, handy
  - Newton scale: Measuring result displayed in Newton
  - Double scale: For fast or precise recording of the measurement result
  - Compressive force measurement: possible using an optional pressure set, see *accessories*
  - Carrying handle as standard
  - Drag pointer as standard on all models of the SAUTER 283 range with [Max] ≥ 50 N
  - Thanks to the rotating suspension bow the scale can always be aligned to be at the very best line of sight on all models of the SAUTER 283 range with [Max] ≥ 50 N

- Backlash-free spring bearing with integrated tare screw for highly-precise adjustment
- Non-fatigue stainless steel spring
- Clip loop which can be freely rotated of the lower suspension bracket by 360°
- High-quality workmanship: Wear-resistant, colour-anodised precision scale with high resolution for accurate readability of the measuring result

- Technical data**
- Measuring precision: ± 0,3 % of [Max]
  - Tare range: 20 % of [Max]

- Accessories**
- 1** Pressure-Set, suitable for models with weighing range < 2,5 kg/25 N, SAUTER 281-890, **€ 85,-**
  - 2** Pressure-Set, suitable for models with weighing range ≥ 5 kg/50 N, SAUTER 285-890, **€ 98,-**
  - 3** Clip, suitable for models with weighing range ≤ 2,5 kg/25 N, SAUTER 281-151-002, **€ 11,-**
  - 4** Drag pointer for spring balances, suitable for models with weighing range < 2,5 kg/25 N, SAUTER 281-051-001, **€ 8,-**
  - Drag pointer for spring balances, suitable for models with weighing range ≥ 5 kg/50 N, SAUTER 285-897, **€ 45,-**

STANDARD



1 DAY

OPTION



+4 DAYS

Model	Measuring range [Max] N	Division [d] N	Load support	5 Dimensions			Price excl. of VAT ex works €	Option	
				Lmin mm	Lmax mm	Ø mm		Factory calibration certificate	
SAUTER								KERN	€
283-152	1	0,01	Hook	225	305	12	115,-	961-1610	187,-
283-252	3	0,02	Hook	225	325	12	128,-	961-1610	187,-
283-302	6	0,05	Hook	225	325	12	128,-	961-1610	187,-
283-402	10	0,1	Hook	225	325	12	125,-	961-1610	187,-
283-422	25	0,2	Hook	225	325	12	132,-	961-1610	187,-
283-483	50	0,5	Hook	370	510	32	255,-	961-1610	187,-
283-502	100	1	Hook	370	510	32	260,-	961-1610	187,-
283-602	200	2	Hook	370	510	32	270,-	961-1610	187,-
283-902	500	5	Hook	370	510	32	320,-	961-1610	187,-



## Mechanical force gauge for tensile and compressive force measurements with peak hold function

### Features

- Dual scale: shows Newton and kg
- Turnable display unit for an easy zero setting of the instrument
- Peak hold function by drag pointer
- Can be mounted on all manual test stands
- Zeroing by a short push of the switch
- **1** Delivered in a robust carrying case
- **2** Standard attachments as shown, extension rod: 90 mm

### Technical data

- Measuring precision: 1 % of [Max]
- Overall dimensions W×D×H 235×60×50 mm
- Thread: M6
- Net weight approx. 0,55 kg

### Accessories

- **2** Standard attachments as standard, set can be reordered, SAUTER AC 43, € 61,-
- Further accessories see *internet*



Model	Measuring range [Max] N	Division [d] N	Price excl. of VAT ex works €	Option Factory Calibration Certificate					
				Tensile Force		Compressive Force		Tensile/Compressive Force	
SAUTER				KERN	€	KERN	€	KERN	€
FA 10	10	0,05	230,-	961-1610	187,-	961-2610	198,-	961-3610	350,-
FA 20	20	0,1	230,-	961-1610	187,-	961-2610	198,-	961-3610	350,-
FA 50	50	0,25	230,-	961-1610	187,-	961-2610	198,-	961-3610	350,-
FA 100	100	0,5	230,-	961-1610	187,-	961-2610	198,-	961-3610	350,-
FA 200	200	1	230,-	961-1610	187,-	961-2610	198,-	961-3610	350,-
FA 300	300	2	230,-	961-1610	187,-	961-2610	198,-	961-3610	350,-
FA 500	500	2,5	230,-	961-1610	187,-	961-2610	198,-	961-3610	350,-

Further calibration options on request



BASIC



## Robust, digital force gauge for tensile and compressive force measurements

### Features

- Turnable display: automatic direction identification
- Secure operability due to the ergonomic design
- Peak-Hold function to capture peaks (value is "frozen" for approx. 10 seconds) or Track function mode for a continuous measurement indication
- Selectable measuring units: N, lbf, kg, ozf
- Auto-Power-Off
- **1** Standard attachments as shown, extension rod: 90 mm
- Can be mounted on all SAUTER test stands up to 5 kN

### Technical data

- Measuring precision: 0,5 % of [Max]
- Overload protection: 200 % of [Max]
- Overall dimensions W×D×H 195×83×35 mm
- Thread: M8
- Ready for use: Batteries included, 6×1.5 V AA
- Net weight approx. 0,75 kg

### Accessories

- **2** With one of the two optional attachments for tensile strength testing, the SAUTER FK can become a tensiometer for testing the material tension characteristics of cables, threads, wires, twine etc. (up to Ø 5 mm): Illustration shows accessories SAUTER FK-A02
- Tensiometer attachment with Safe-insert function: Pull and release to insert the running cable in between the rolls, for tensile strength testing up to 250 N, aluminium attachment, rolls can be adjusted inwards, SAUTER FK-A01, **€ 230,-**
- Tensiometer kit for high-capacity tensile strength testing up to 1000 N, steel attachment and steel rolls, rolls cannot be adjusted, SAUTER FK-A02, **€ 320,-**
- **1** Standard attachments as standard, set can be reordered, SAUTER AC 430, **€ 55,-**
- Further accessories see *internet*

#### STANDARD




#### OPTION



Model	Measuring range [Max] N	Division [d] N	Price excl. of VAT ex works €	Option Factory Calibration Certificate					
				Tensile Force		Compressive Force		Tensile/Compressive Force	
SAUTER				KERN	€	KERN	€	KERN	€
FK 10	10	0,005	275,-	961-1610	187,-	961-2610	198,-	961-3610	350,-
FK 25	25	0,01	275,-	961-1610	187,-	961-2610	198,-	961-3610	350,-
FK 50	50	0,02	275,-	961-1610	187,-	961-2610	198,-	961-3610	350,-
FK 100	100	0,05	275,-	961-1610	187,-	961-2610	198,-	961-3610	350,-
FK 250	250	0,1	275,-	961-1610	187,-	961-2610	198,-	961-3610	350,-
FK 500	500	0,2	275,-	961-1610	187,-	961-2610	198,-	961-3610	350,-
FK 1K	1000	0,5	275,-	961-1620	240,-	961-2620	240,-	961-3620	430,-

Further calibration options on request



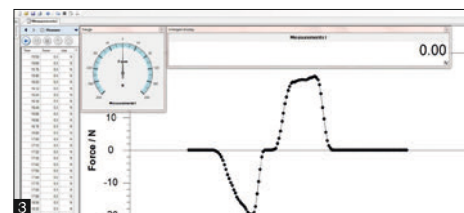

## Compact force gauge for tensile and compressive force measurements

### Features

- Turnable display with backlight
- Peak-Hold function to capture the peak value or Track function for continuous display of measurement
- Metal housing for durable use in harsh environmental conditions
- Capacity display: A bar lights up to show how much of the measuring range is still available
- Measuring with tolerance range (limit-setting function): Upper and lower limit adjustable, between 10 and 100 % of [Max], in pull and push direction. The process is supported by an acoustic and visual signal
- Safety: If loads exceed 110 % of the measuring range, the device will give clear acoustic and visual signals

- Internal memory for up to 500 measurement values
- USB data interface and USB interface cable as standard
- Selectable: AUTO-OFF function or permanent operation
- Selectable measuring units: N, kgf, ozf, lbf
- **1** Delivered in a robust carrying case
- **2** Standard attachments as shown, extension rod: 90 mm
- Can be mounted on all SAUTER test stands up to 5 kN

### Technical data

- Measuring precision: 0,3 % of [Max]
- Transmission rate to PC: up to 200 measured values/second
- Overload protection: 150 % of [Max]
- Overall dimensions W×D×H 145×73×34 mm
- Thread: M6
- Rechargeable battery pack integrated, as standard, operating time up to 20 h without backlight, charging time approx. 4 h
- Net weight approx. 0,50 kg

### Accessories

- **3** Data transfer software with graphic display of the measurement process, force-time, SAUTER AFH FAST, **€ 115,-**
- **2** Standard attachments as standard, set can be reordered, SAUTER AC 43, **€ 61,-**
- Further accessories see *internet*

#### STANDARD



#### OPTION



Model	Measuring range [Max] N	Readability [d] N	Price excl. of VAT ex works €	Option DAKKS Calibration Certificate					
				Tensile Force		Compressive Force		Tensile/Compressive Force	
SAUTER				DAKKS KERN	€	DAKKS KERN	€	DAKKS KERN	€
FC 10	10	0,01	415,-	963-161	187,-	963-261	187,-	963-361	340,-
FC 50	50	0,01	415,-	963-161	187,-	963-261	187,-	963-361	340,-
FC 100	100	0,1	415,-	963-161	187,-	963-261	187,-	963-361	340,-
FC 500	500	0,1	415,-	963-161	187,-	963-261	187,-	963-361	340,-
FC 1K	1000	1	415,-	963-162	225,-	963-262	225,-	963-362	420,-

Further calibration options on request

# INDIVIDUAL CUSTOMIZED SOLUTIONS DESIGNED TO YOUR REQUIREMENTS

## You haven't found a matching clamping solution in our assortment?

No problem, we will develop the matching clamping system that is tailored to your test system. With innovative solutions and many years of experience, we provide your team or company with technological support and jointly develop the suitable clamping system.

## CUSOS – perfectly tailored to you and your requirements

The development of your customised clamping system is carried out using the latest technologies. From the idea, during the development, the manufacturing process, to the finished product, we and our partners use the latest and most modern techniques.





Contact us today and ask for your individual solution.



**CUSTOMIZED**  
SOLUTION SERVICE



Enrico Steier  
Product Manager SAUTER  
Force Measurement  
Tel. +49 7433 9933-194  
[enrico.steier@kern-sohn.com](mailto:enrico.steier@kern-sohn.com)

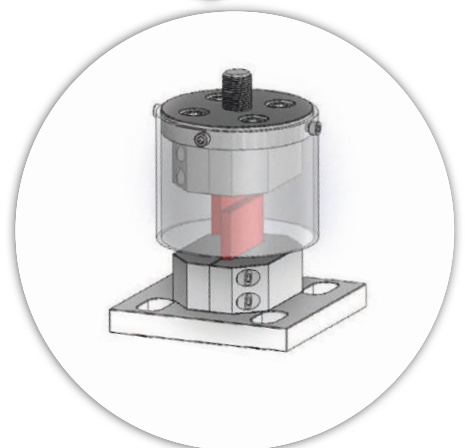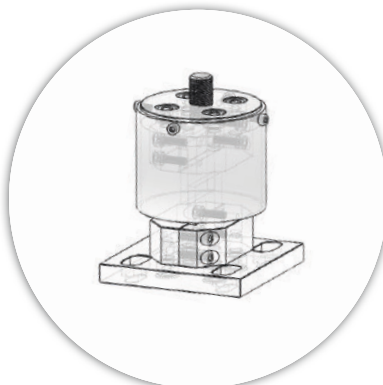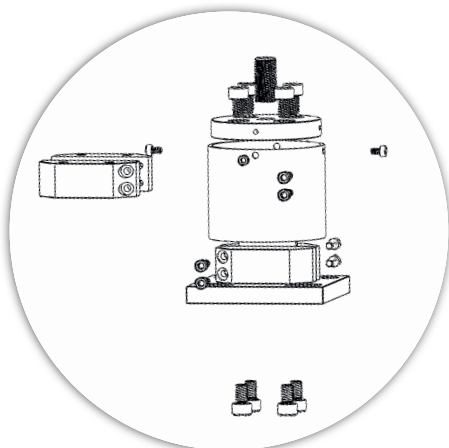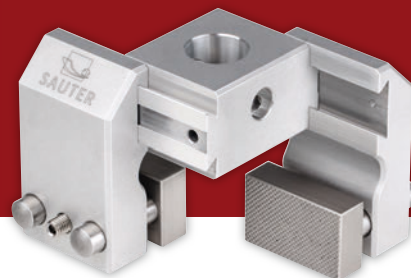

FACE  
LIFT

## Universal digital force gauge for tensile and compressive force measurements with integrated load cell

### Features

- Turnable display with backlight
- **1** Can be mounted on all SAUTER test stands up to 5 kN
- **2** NEW: USB interface for data transfer and power supply as standard
- Data interface RS-232 as standard
- Selectable measuring units: N, kgf, lbf
- Peak-Hold function to capture the peak value or Track function for continuous display of measurement
- Measuring with tolerance range (limit-setting function): Upper and lower limit adjustable, in pull and push direction. The process is supported by an audible and visual signal
- Auto-Power-Off
- Internal memory for up to 10 measurement values

- Mini Statistics Kit: calculates the average result from up to 10 stored measured values, as well as min., max., n
- **3** Standard attachments as shown, extension rod: 90 mm, included with the delivery
- **4** Delivered in a robust carrying case

### Technical data

- Transfer rate to PC: approx. 25 measured values per second
- Measuring precision: 0,5 % of [Max]
- Overload protection: 150 % of [Max]
- Thread: M6
- Overall dimensions W×D×H 240×70×40 mm
- Rechargeable battery pack integrated, as standard, operating time up to 40 h without backlight, charging time approx. 120 min
- External mains adapter, for connection to the USB-C connector, standard
- Net weight approx. 0,55 kg

### Accessories

- Data transfer software with graphic display of the measurement process, force-time, SAUTER AFH FAST, **€ 115,-**
- RS 232 connection cable to connect models from the SAUTER FH range to an electric SAUTER test bench, SAUTER FH-A04, **€ 45,-**
- **3** Standard attachments as standard, set can be reordered, SAUTER AC 43, **€ 61,-**

#### STANDARD



#### OPTION



Model	Measuring range [Max]	Readability [d]	Price excl. of VAT ex works €	Option <b>DAkkS Calibration Certificate</b>					
				Tensile Force		Compressive Force		Tensile/Compressive Force	
				DAkkS KERN	€	DAkkS KERN	€	DAkkS KERN	€
<b>SAUTER</b>	N	N	€						
<b>FH 2</b>	2	0,001	<b>590,-</b>	-	-	-	-	-	-
<b>FH 5</b>	5	0,001	<b>590,-</b>	-	-	-	-	-	-
<b>FH 10</b>	10	0,005	<b>590,-</b>	963-161	187,-	963-261	187,-	963-361	340,-
<b>FH 20</b>	20	0,01	<b>590,-</b>	963-161	187,-	963-261	187,-	963-361	340,-
<b>FH 50</b>	50	0,01	<b>590,-</b>	963-161	187,-	963-261	187,-	963-361	340,-
<b>FH 100</b>	100	0,05	<b>590,-</b>	963-161	187,-	963-261	187,-	963-361	340,-
<b>FH 200</b>	200	0,1	<b>590,-</b>	963-161	187,-	963-261	187,-	963-361	340,-
<b>FH 500</b>	500	0,1	<b>590,-</b>	963-161	187,-	963-261	187,-	963-361	340,-

Further calibration options on request

FACE  
LIFT

## Universal digital force gauge for tensile and compressive force measurements with external load cell

### Features

- Turnable display with backlight
- **1** NEW: USB interface for data transfer and power supply as standard
- Data interface RS-232 as standard
- Selectable measuring units: N, kN, kgf, tf
- Peak-Hold function to capture the peak value or Track function for continuous display of measurement
- Measuring with tolerance range (limit-setting function): Upper and lower limit adjustable, in pull and push direction. The process is supported by an audible and visual signal
- Auto-Power-Off
- Internal memory for up to 10 measurement values

- Mini Statistics Kit: calculates the average result from up to 10 stored measured values, as well as min., max., n
- Tension loops and compression plates are included in delivery
- **2** Delivered in a robust carrying case

### Technical data

- Transfer rate to PC: approx. 25 measured values per second
- Measuring precision: 0,5 % of [Max]
- Overload protection: 150 % of [Max]
- Overall dimensions W×D×H 240×70×40 mm
- Rechargeable battery pack integrated, as standard, operating time up to 40 h without backlight, charging time approx. 120 min
- External mains adapter, for connection to the USB-C connector, standard
- Cable length approx. 3 m
- Net weight approx. 1,6 kg

### Accessories

- Data transfer software with graphic display of the measurement process, force-time, SAUTER AFH FAST, **€ 115,-**
- RS 232 connection cable to connect models from the SAUTER FH range to an electric SAUTER test bench, SAUTER FH-A04, **€ 45,-**

#### STANDARD



#### OPTION



Model	Measuring range [Max] kN	Readability [d] N	Price excl. of VAT ex works €	Option <b>DAKkS Calibration Certificate</b> (≤ 5 kN) / <b>Factory calibration certificate</b> (> 5 kN)					
				Tensile Force		Compressive Force		Tensile/Compressive Force	
SAUTER				KERN	€	KERN	€	KERN	€
<b>FH 1K</b>	1	0,5	<b>1000,-</b>	963-162	225,-	963-262	225,-	963-362	420,-
<b>FH 2K</b>	2	1	<b>1000,-</b>	963-162	225,-	963-262	225,-	963-362	420,-
<b>FH 5K</b>	5	1	<b>1270,-</b>	963-163	315,-	963-263	315,-	963-363	560,-
<b>FH 10K</b>	10	5	<b>1500,-</b>	961-164	410,-	961-264	410,-	961-364	610,-
<b>FH 20K</b>	20	10	<b>1500,-</b>	961-164	410,-	961-264	410,-	961-364	610,-
<b>FH 50K</b>	50	10	<b>1750,-</b>	961-165	410,-	961-265	410,-	961-365	610,-
<b>FH 100K</b>	100	50	<b>1970,-</b>	961-166	455,-	961-266	455,-	961-366	670,-

Further calibration options on request





## Universal digital force gauge with graphic-assisted display and integrated load cell

### Features

- Turnable display with backlight
- Peak-Hold function to capture the peak value or Track function for continuous display of measurement
- Metal housing for durable use in harsh environmental conditions
- Can be mounted on all SAUTER test stands up to 5 kN
- Capacity display: A bar lights up to show how much of the measuring range is still available
- Measuring with tolerance range (limit-setting function): Upper and lower limit adjustable, in pull and push direction. The process is supported by a visual signal
- Internal memory for up to 500 measurement values

- Continuous analogue output: Linear voltage signal in dependence to the load (-2 to +2V)
- USB data interface, as standard
- Selectable measuring units: N, kN, kgf, lbf
- 1 Standard attachments: as shown
- 2 Delivered in a robust carrying case

### Technical data

- Transfer rate to PC: approx. 25 measured values per second
- Measuring precision: 0,2 % of [Max]
- Overload protection: 120 % of [Max]
- Overall dimensions W×D×H 215×75×30 mm
- Thread: M6
- Rechargeable battery pack integrated, as standard, operating time up to 10 h without backlight, charging time approx. 8 h
- Net weight approx. 0,55 kg

### Accessories

- Plug-In for data transfer of measuring data from the measuring instrument and transfer to a PC, e.g. in Microsoft Excel®, SAUTER AFI-2.0, see *internet*
- Data transfer software with graphic display of the measurement process, force-time, SAUTER AFH FAST, € 115,-
- USB/PC connection cable (USB-A/USB mini), included with the delivery, can be ordered separately, SAUTER FL-A01, € 50,-
- RS-232 adapter cable, SAUTER FL-A04, € 50,-
- Holders for object fixation and other accessories, please see *internet*

#### STANDARD



#### OPTION



Model	Measuring range [Max]	Readability [d]	Price excl. of VAT ex works €	Option DAKKS Calibration Certificate					
				Tensile Force		Compressive Force		Tensile/Compressive Force	
SAUTER	N	N	€	DAKKS KERN	€	DAKKS KERN	€	DAKKS KERN	€
FL 5	5	0,002	570,-	-	-	-	-	-	-
FL 10	10	0,005	570,-	963-161	187,-	963-261	187,-	963-361	340,-
FL 20	25	0,01	570,-	963-161	187,-	963-261	187,-	963-361	340,-
FL 50	50	0,02	570,-	963-161	187,-	963-261	187,-	963-361	340,-
FL 100	100	0,05	570,-	963-161	187,-	963-261	187,-	963-361	340,-
FL 200	250	0,1	570,-	963-161	187,-	963-261	187,-	963-361	340,-
FL 500	500	0,2	570,-	963-161	187,-	963-261	187,-	963-361	340,-
FL 1K	1000	0,5	650,-	963-162	225,-	963-262	225,-	963-362	420,-

Further calibration options on request





Powerful digital force gauge with graphic assisted display for tensile and compressive force measurements with external load cell

Features

- Premium force gauge with external measuring cell, tension loops included with delivery
- Turnable display with backlight
- Peak-Hold function to capture the peak value or Track function for continuous display of measurement
- Metal housing for durable use in harsh environmental conditions
- Can be mounted on all SAUTER test stands starting 1 kN
- Capacity display: A bar lights up to show how much of the measuring range is still available
- Measuring with tolerance range (limit-setting function): Upper and lower limit adjustable, in pull and push direction. The process is supported by a visual signal
- Internal memory for up to 500 measurement values

- Continuous analogue output: Linear voltage signal in dependence to the load (-2 to +2V)
- USB data interface, as standard
- Selectable measuring units: N, kN, kgf, ozf, lbf
- Delivered in a robust carrying case

Technical data

- Transfer rate to PC: approx. 25 measured values per second
- Measuring precision: 0,2 % of [Max]
- Overload protection: 120 % of [Max]
- Overall dimensions W×D×H 175×75×30 mm
- Dimensions load cell W×D×H 76,2×51×19 mm (FL 2K), 76,2×51×28 mm (FL 5K, 10K, 20K)
- Thread: M12
- Rechargeable battery pack integrated, as standard, operating time up to 10 h without backlight, charging time approx. 8 h
- Net weight approx. 1,4 kg

Accessories

- Plug-In for data transfer of measuring data from the measuring instrument and transfer to a PC, e.g. in Microsoft Excel®, SAUTER AFI-2.0, see *internet*
- Data transfer software with graphic display of the measurement process, force-time, SAUTER AFH FAST, **€ 115,-**
- USB/PC connection cable (USB-A/USB mini), included with the delivery, can be ordered separately, SAUTER FL-A01, **€ 50,-**
- RS-232 adapter cable, SAUTER FL-A04, **€ 50,-**
- Holders for object fixation and other accessories, please see *internet*

STANDARD

OPTION

Model	Measuring range [Max] N	Readability [d] N	Price excl. of VAT ex works €	Option <b>DAkKS Calibration Certificate</b> (≤ 5 kN)/ <b>Factory calibration certificate</b> (> 5 kN)					
				Tensile Force		Compressive Force		Tensile/Compressive Force	
SAUTER				KERN	€	KERN	€	KERN	€
FL 2K	2500	1	690,-	963-162	225,-	963-262	225,-	963-362	420,-
FL 5K	5000	2	1070,-	963-163	315,-	963-263	315,-	963-363	560,-
FL 10K	10000	5	1250,-	961-164	410,-	961-264	410,-	961-364	610,-
FL 20K	20000	10	1290,-	961-164	410,-	961-264	410,-	961-364	610,-

Further calibration options on request



Measurement of forces in different tensile or compression directions possible with only one measuring device



Supplied in a high-quality and robust system case (systainer® T-LOC) including plug-in power supply and USB cable type C

## Premium force gauge with integrated load cell (optional) and connection possibility for up to 4 external load cells

### Use with integrated load cell

The SAUTER FS premium force gauge has an load measuring cell for tensile and compressive force applications. Either mobile for rapid testing or stationary integrated into a test stand or production line, the multifunction display allows all the values recorded to be read off at a glance in real time. Via the integrated interface, the data can be sent to a PC or laptop for further processing.

### Use with external load cells

The SAUTER FS premium force gauge is compatible with all SAUTER strain gauge measuring cells, see *Measuring Cells*. Up to 4 external measuring cells can be connected simultaneously.



Tip: Order the practical system case (systainer® T-LOC) for storing and transporting of accessories, clamps, sensors, etc. at the same time, SAUTER FS TKZ, see *Accessories*



User-friendly touch pen for display included with the delivery



Simultaneous measurement on up to four channels. External sensors with sensor data memory, optionally available, see *Measuring Cells*



Compact force gauge with internal measuring cell (up to max. 500 N) for fast and mobile force measurements. Illustration shows optional accessories, SAUTER AE 500 screw tension clamp

## Features

- 3,5" touchscreen with touch pen
- Standard version with 2 or 4 measuring channels for external force sensors (subsequently expandable from 2 to 4)
- An internal load cell is possible (is deactivated if an external load cell is connected)
- Suitable for 4-wire and 6-wire sensors with strain gauges
- Two-point adjustment with weights or numerical adjustment possible
- The specific data of an external sensor are stored directly in the connector
- USB interface for data transfer and power supply as standard
- Internal device memory (16 GB)
- Adjustable SI units: kg, N, kN, mN, MN, Nm, kNm, mNm
- Tolerance function
- Track function for continuous measurement display
- Peak value measurement

## Technical data

- Resolution: up to 10000 points per measurement channel
- Storage of measured values as well as their transmission to the interface with up to 1000 Hz per measuring channel
- Measurement accuracy:
  - with internal load cell: 0.1 % of [Max]
  - with external load cell: among other things from the load cells used
- Overload protection: 150 % of [Max] with internal measuring cell
- Thread on load receptor: M6 (outer)
- Rechargeable battery pack integrated, as standard, operating time up to 8 h without backlight, charging time approx. 8 h
- External mains adapter, for connection to the USB-C connector, standard
- Overall dimensions W×D×H 71×31×180 mm
- Net weight approx. 0,40 kg

## Accessories

- For subsequent expansion to 4 measuring channels, A/D converter module, only for FS 2 and FS 2-xxx models, SAUTER FS 34, € 205,-
- Stainless steel handle bar with rubber grip, SAUTER AFK 02, € 105,-
- Transport case, e.g. for accessories, SAUTER FS TKZ, € 125,-
- Standard attachments, SAUTER AC 43, € 61,-
- Hook for tensile and fracture testing up to 500 N, thread: M6, 1 item, SAUTER AC 49, € 21,-
- Plug-In for data transfer of measuring data from the measuring instrument and transfer to a PC, e.g. in Microsoft Excel®, SAUTER AFI-2.0, see *internet*
- Suitable load cells see page 86 et seq.
- Holders for object fixation and other accessories, please see *internet*

Optional calibration, see page 101

Calibration is recommended for each measuring cell!

Assembly and adjustment of measuring cell, connector and sensors must be ordered separately, see table below, SAUTER FS 401 - FS 408

## Order example SAUTER FS force gauge with 2 load cells:

1×	FS 2-500	2-channel force gauge with integrated load cell for tension/compression force measurements
1×	963-361	DAkkS calibration certificate tension/compression force up to 500 N
1×	CO 100-Y1	Miniature compression load cell up to 1 kN
1×	FS 403	Two-point adjustment up to 2 kN, incl. plug and memory for SAUTER FS
1×	963-262	DAkkS calibration certificate compression force up to 2 kN
1×	CS 500-3P2	Stainless steel "S" load cell for tension/compression force up to 5 kN
1×	963-363	DAkkS calibration certificate tension/compression force up to 5 kN
1×	FS 404	Two-point adjustment up to 5 kN, incl. connector and memory for SAUTER FS

## STANDARD



## OPTION



## Service required for use with external sensors

Model	Measuring range internal load cell [Max] N	Readability internal load cell [d] N	Internal load cell	Number of measuring channels	Price excl. of VAT ex works €	Model	Adjustment of optional, external sensors	Measuring range [Max] kN	Price excl. of VAT ex works €
<b>SAUTER</b>						<b>SAUTER</b>			
FS 2	-	-	-	2	950,-	FS 401	Numeric*	-	135,-
FS 2-20	20	0,004	•	2	1070,-	FS 402	Two-point	0,05	160,-
FS 2-50	50	0,01	•	2	1070,-	FS 403		2	170,-
FS 2-100	100	0,02	•	2	1070,-	FS 404		5	195,-
FS 2-200	200	0,04	•	2	1070,-	FS 405		20	205,-
FS 2-500	500	0,1	•	2	1070,-	FS 406		50	205,-
FS 4	-	-	-	4	1070,-	FS 407		120	225,-
FS 4-20	20	0,004	•	4	1180,-	FS 408		250	240,-
FS 4-50	50	0,01	•	4	1180,-				
FS 4-100	100	0,02	•	4	1180,-				
FS 4-200	200	0,04	•	4	1180,-				
FS 4-500	500	0,1	•	4	1180,-				

\*only for sensors > 250 kN



## Practical set of premium force gauge and measuring cell

### Features

- Thanks to several versions, the pre-configured sets are suitable for tensile and compressive force measurements in a wide range of applications. The set includes the premium force gauge FS 2 and the necessary service FS 401 – FS 408
- It is supplemented optionally by:
  - FS SP1: 4-wire “S” measuring cell made of nickel-plated steel for force and mass measurement (CS P1). For tensile force and compressive force measurements, see larger picture
  - **1** FS RY1: Loadcell made of steel alloy (CR Y1). For tensile force and compressive force measurements
  - **2** FS RQ1: Load cell made of stainless steel (CR Q1). For compressive force measurements
  - **3** FS OY1: Miniature cylindrical load cell made from stainless steel (CO Y1). For compressive force measurements
  - **4** FS OY2: Miniature cylindrical load cell made from stainless steel (CO Y2). For tensile force and compressive force measurements





### Accessories

- For subsequent expansion to 4 measuring channels, A/D converter module, only for FS 2 and FS 2-xxx models, SAUTER FS 34, **€ 205,-**
- Max ≤ 10.000 N: Transport case, e.g. for accessories, SAUTER FS TKZ, **€ 125,-**
- Plug-In for data transfer of measuring data from the measuring instrument and transfer to a PC, e.g. in Microsoft Excel®, SAUTER AFI-2.0, see *internet*
- Holders for object fixation and other accessories, please see *internet*

#### STANDARD



FS SP1,  
FS RY1,  
FS OY2

#### OPTION



≤ 5 kN

Model	Measuring range [Max] N	Readability [d] N	Load cell in the set	Price excl. of VAT ex works €	Option <b>DAkKS Calibration Certificate (≤ 5 kN)/Factory calibration certificate (&gt; 5 kN)</b>					
					Tensile Force		Compressive Force		Tensile/Compressive Force	
SAUTER					KERN	€	KERN	€	KERN	€
<b>FS SP1:</b> For tensile force and compressive force measurements										
<b>FS 2-1KSP1</b>	1000	0,2	CS 100-3P1	<b>1300,-</b>	963-162	225,-	963-262	225,-	963-362	420,-
<b>FS 2-2KSP1</b>	2500	0,5	CS 250-3P1	<b>1300,-</b>	963-163	315,-	963-263	315,-	963-363	560,-
<b>FS 2-5KSP1</b>	5000	1	CS 500-3P1	<b>1320,-</b>	963-163	315,-	963-263	315,-	963-363	560,-
<b>FS 2-10KSP1</b>	10000	2	CS 1000-3P1	<b>1350,-</b>	961-164	410,-	961-264	410,-	961-364	610,-
<b>FS 2-20KSP1</b>	20000	4	CS 2000-3P1	<b>1390,-</b>	961-164	410,-	961-264	410,-	961-364	610,-
<b>FS 2-50KSP1</b>	50000	10	CS 5000-3P1	<b>1390,-</b>	961-165	410,-	961-265	410,-	961-365	610,-
<b>FS 2-100KSP1</b>	100000	20	CS 10000-3P1	<b>1660,-</b>	961-166	455,-	961-266	455,-	961-366	670,-
<b>1 FS RY1:</b> For tensile force and compressive force measurements										
<b>FS 2-5KRY1</b>	5000	1	CR 500-1Y1	<b>1380,-</b>	963-161	187,-	963-263	315,-	963-363	560,-
<b>FS 2-10KRY1</b>	10000	2	CR 1000-1Y1	<b>1380,-</b>	961-164	410,-	961-264	410,-	961-364	610,-
<b>FS 2-50KRY1</b>	50000	10	CR 5000-1Y1	<b>1390,-</b>	961-165	410,-	961-265	410,-	961-365	610,-
<b>FS 2-100KRY1</b>	100000	20	CR 10000-1Y1	<b>1550,-</b>	961-166	455,-	961-266	455,-	961-366	670,-
<b>FS 2-200KRY1</b>	200000	40	CR 20000-1Y1	<b>1560,-</b>	961-167	455,-	961-267	455,-	961-367	670,-
<b>2 FS RQ1:</b> For compressive force measurements										
<b>FS 2-25KRQ1</b>	25000	5	CR 2500-1Q1	<b>1410,-</b>	-	-	961-265	410,-	-	-
<b>FS 2-50KRQ1</b>	50000	10	CR 5000-1Q1	<b>1410,-</b>	-	-	961-265	410,-	-	-
<b>FS 2-100KRQ1</b>	100000	20	CR 10000-1Q1	<b>1390,-</b>	-	-	961-266	455,-	-	-
<b>3 FS OY1:</b> For compressive force measurements										
<b>FS 2-500OY1</b>	500	0,1	CO 50-Y1	<b>1250,-</b>	-	-	963-261	187,-	-	-
<b>FS 2-2KOY1</b>	2000	0,4	CO 200-Y1	<b>1260,-</b>	-	-	963-262	225,-	-	-
<b>FS 2-5KOY1</b>	5000	1	CO 500-Y1	<b>1320,-</b>	-	-	963-263	315,-	-	-
<b>FS 2-20KOY1</b>	20000	4	CO 2000-Y1	<b>1350,-</b>	-	-	961-264	410,-	-	-
<b>4 FS OY2:</b> For tensile force and compressive force measurements										
<b>FS 2-100OY2</b>	100	0,02	CO 10-Y2	<b>1320,-</b>	963-161	187,-	963-261	187,-	963-361	340,-
<b>FS 2-500OY2</b>	500	0,1	CO 50-Y2	<b>1320,-</b>	963-161	187,-	963-261	187,-	963-361	340,-
<b>FS 2-1KOY2</b>	1000	0,2	CO 100-Y2	<b>1390,-</b>	963-162	225,-	963-262	225,-	963-362	420,-





## Fast testing of the stability of tombstones in accordance with VSG 4.7

### SAUTER FA-G

- Pressure disc with foam rubber attachment
- Stainless steel handle with rubber covering for secure handling
- No electrical power supply required due to mechanical measuring system
- Real time or peak hold switch to observe transients or capture peaks by a drag indicator
- For tensile force and compressive force measurements
- Scope of delivery:
  - 1× FA 500
  - 1× AE 08
  - 1× AFH 04

### SAUTER FL-G

- Ideal for the documented certification of specialist stone-cutter companies
- Rechargeable battery with long operating time (significantly more than 8 hours), so it is possible to use the device for a whole working day, in mobile mode
- Function to set limits: This is where you can program a stability limit value. If this limit value is exceeded, the device emits a visual signal. In this way, the measuring result does not need to be read off each time
- Wide pressure plate with foam rubber surface, so that the tombstone does not get scratched when force is applied
- Robust metal housing for permanent use under harsh environmental conditions
- Scope of delivery:
  - 1× FL 500/FL 1K
  - 1× AE 08
  - 1× AFH 04

### SAUTER FS-G

- Through the internal and also external measuring cell it can also be used for more than just tombstone testing
- 3,5" touchscreen
- USB interface for data transfer and power supply as standard
- Internal device memory (16 GB)
- Tolerance function
- Track function for continuous measurement display
- Peak value measurement
- Scope of delivery:
  - 1× FS 2-500
  - 1× AE 08
  - 1× AFK 02

Further details and plenty of further accessories see *internet*




#### STANDARD



#### OPTION



#### STANDARD



#### STANDARD



#### OPTION



#### OPTION



SAUTER		FA 500G	FL 500G	FL 1KG	FS 500G
Measuring range [Max] N		500	500	1000	500
Readout [d] N		2,5	0,2	0,5	0,1
Measuring precision of [Max]		1 %	0,2 %	0,2 %	0,1 %
Overload protection of [Max]		150 %	120 %	120 %	150 %
Price excl. of VAT ex works, €		355,-	690,-	810,-	1160,-
Option	Tensile force	961-1610, € 187,-	961-161, € 187,-	961-162, € 225,-	961-161, € 187,-
Factory calibration certificate	Compressive force	961-2610, € 198,-	961-261, € 187,-	961-262, € 225,-	961-261, € 187,-
	Tensile/Compressive force	961-3610, € 350,-	961-361, € 340,-	961-362, € 420,-	961-361, € 340,-
Option	Tensile force	-	963-161, € 187,-	963-162, € 225,-	963-161, € 187,-
DAkS Calibration certificate	Compressive force	-	963-261, € 187,-	963-262, € 225,-	963-261, € 187,-
	Tensile/Compressive force	-	963-361, € 340,-	963-362, € 420,-	963-361, € 340,-



Compact force measuring instrument

Features

- Checking the consistency of sprayed concrete is essential to ensure the maximum strength of the concrete during the curing process
- The FC 1K-BT determines exactly the forces required for the needle to penetrate the concrete. This allows reliable conclusions to be made regarding the compressive strength of the concrete during the dry phase
- Peak-Hold function to capture the peak value or Track function for continuous display of measurement
- Metal housing for durable use in harsh environmental conditions
- Capacity display: A bar lights up to show how much of the measuring range is still available
- Limit value function, programming of Max./Min., with output of acoustic and optical signal per ok indication
- Safety: If loads exceed 110 % of the measuring range, the device will give clear acoustic and visual signals

- Internal memory for up to 500 measurement values
- Turnable display with backlight
- Selectable: AUTO-OFF function or continuous operation, charge indicator
- Delivered in a robust carrying case

Technical data

- Transmission rate to PC: up to 200 measured values/second
- Measuring precision: 0,3 % of [Max]
- Overload protection: 150 % of [Max]
- Housing dimensions W×D×H 145×73×34 mm
- Net weight approx. 1,8 kg
- Selectable measuring units: N, kgf, ozf, lbf
- Robust, cleanable and portable construction
  - Built-in 1000 N force measuring cell
  - Rapid and simple changing of the penetration needle
  - Inverted display for better readability
  - Live peak force value for immediate monitoring
  - Measurement precision ± 0,1 %
  - USB interface

- Penetration needle and adapter
  - Removable if necessary
  - Needle diameter: 3 mm
  - Upper angle: 60 degrees
  - Length: 15 mm
  - Included: 15 needles

Accessories

- Spare needles (1 piece) for concrete tester SAUTER BT-A01, € 50,-
- Further accessories see *internet*

STANDARD

PEAK

PUSH/PULL

MEMORY

RS 232

USB

UNIT

TOL

ZERO

ACCU

230 V

1 DAY

OPTION

SOFTWARE

DAkks

ISO

Model	Measuring range [Max] N	Readability [d] N	Price excl. of VAT ex works €	Option DAkks Calibration Certificate			
				Tensile Force		Compressive Force	
SAUTER				DAkks KERN	€	DAkks KERN	€
FC 1K-BT	1000	1	1320,-	963-162	225,-	963-262	225,-



## Manual test stand for highly accurate tensile and compressive force measurements

### Features

- For vertical and horizontal use
- Precise measurement results
- High level of security at repeated measurements
- Large base plate with high versatility of fastening objects
- SAUTER TVL, TVL-XLS: Digital length meter SAUTER LA (without interface) as standard
  - Measuring range: max. 200 mm
  - Readability: 0,01 mm
  - Zero setting possible
  - Pre-length can be set manually
- **1** SAUTER TVL-O: Manual test bench without SAUTER LA length measuring device
- **2** SAUTER TVL-E: Test bench for force-measuring devices with an external measuring cell
- SAUTER TVL-O, TVL-E: As an option, the SAUTER LB length measuring device (with interface) can be fitted, see *accessories*

- SAUTER TVL, TVL-XLS, TVL-O: Suitable for all SAUTER force measuring devices with internal measuring cell up to 1000 N (not included in delivery)
- SAUTER TVL-E: Suitable for all SAUTER force measuring devices with external measuring cell up to 2000 N (not included in delivery)
- SAUTER TVL: Hook with M6 thread as standard
- SAUTER TVL-XLS: consisting of: SAUTER TVL + SAUTER TVL-XL, see *accessories*
- **3** Model TVL and TVL-XLS in size comparison

### Technical data

- Base plate with threaded hole M6
- Travel distance per knob rotation (stroke per one turn):  
SAUTER TVL-XLS, TVL, TVL-O: 3 mm  
SAUTER TVL-E: 2 mm

### Accessories

- Extension kit for SAUTER TVL, extends the working area by 340 mm, enabling larger test pieces to be measured. The traverse distance (spindle height from base plate) remains the same: 230 mm. Overall dimensions W×D×H 35×110×344 mm, Net weight approx. 2,8 kg, can be retrofitted, SAUTER TVL-XL, **€ 330,-**
- Digital length measuring device, measuring range 200 mm, readability 0,01 mm, details see page 39, SAUTER LB 200-2, **€ 1140,-**
- Mounting the length measuring device LB onto a SAUTER test stand at the factory, SAUTER LB-A02, **€ 210,-**
- Data transfer software with graphic display of the measurement process, force-time, SAUTER AFH FAST, **€ 115,-**  
Force-displacement only in combination with SAUTER LB, SAUTER AFH FD, **€ 710,-**

Save with our practical bundles of test stand, force gauge and matching clamps, e.g. SAUTER TVL 500FHS71, consisting of:

- 1× TVL
- 1× FH 500 (Details see page 12)
- 2× AE 500 (Details see page 34)

You can find our bundles on page 24

STANDARD



TVL, TVL-XLS

Model	Measuring range [Max] N	Maximum travel distance mm	Length measuring device at delivery	Dimensions W×D×H mm	Net weight approx. kg	Price excl. of VAT ex works €
<b>SAUTER</b>						
<b>TVL-XLS</b>	500	230	Length measuring device with display	200×300×800	12	<b>760,-</b>
<b>TVL</b>	1000	230		151×234×465	9	<b>450,-</b>
<b>TVL-O</b>	1000	230	Length measuring device with display and data interface (optional)	151×234×465	9	<b>290,-</b>
<b>TVL-E</b>	2000	290		154×240×550	8	<b>610,-</b>



SAUTER TVP



SAUTER TVP-L

Manual test stands for compressive force measurements, also with digital length measurement

Features

- Provides quick and consistent testing
- High level of security at repeated measurements
- Provides maximum versatility and precise measuring results
- Slide construction for distance measurement
- Large base plate with high versatility of fastening objects
- Suitable for all SAUTER force gauges up to 500 N (not included in delivery)
- SAUTER TVP-L: Digital length meter
  - Measuring range: 100 mm
  - Readability: 0,01 mm
  - Zero setting possible
  - Pre-length can be set manually

Technical data

- Maximum work zone: 315 mm
- Maximum stroke length: 78 mm
- Base plate with threaded hole M6
- Overall dimensions W×D×H 150×233×420 mm
- Net weight approx. 11 kg


Accessories

- Data transfer software with graphic display of the measurement process, force-time, SAUTER AFH FAST, **€ 115,-**


Only TVP-L:

- Digital length measuring device, measuring range 200 mm, readability 0,01 mm, details see page 39, SAUTER LB 200-2, **€ 1140,-**
- Mounting the length measuring device LB onto a SAUTER test stand at the factory, SAUTER LB-A02, **€ 210,-**
- Data transfer software with graphical representation of the measuring process Force-displacement only in combination with SAUTER LB, SAUTER AFH FD, **€ 710,-**


STANDARD



SCALE



FAST-MOVE



1 DAY

TVP-L

Model	Measuring range	Price excl. of VAT ex works €
	[Max] N	
SAUTER		
TVP	500	305,-
TVP-L	500	445,-



The practical all-in-one package for rapid, simple testing

FH 500S71

- All-in-One: Digital force-measuring device incl. clamp
- For rapid, simple testing of forces up to 500 N
- Assembly and configuration of the parts is not required and therefore saves time and effort
- For tensile force and compressive force measurements

Accessories

- Data transfer software with graphic display of the measurement process, force-time, SAUTER AFH FAST, € 115,-

TVL 500FHS71

- All-in-One: test stand with digital force-measuring device and 2 clamps
- For manual testing with a pitch of 3 mm/rotation and for forces up to 500 N
- Assembly and configuration of the parts is not required and therefore saves time and effort
- For tensile force and compressive force measurements

Accessories

- Digital length measuring device, measuring range 200 mm, readability 0,01 mm, details see page 39, SAUTER LB 200-2, € 1140,-
- Mounting the length measuring device LB onto a SAUTER test stand at the factory, SAUTER LB-A02, € 210,-
- Data transfer software with graphic display of the measurement process, force-time, SAUTER AFH FAST, € 115,-  
Force-displacement only in combination with SAUTER LB, SAUTER AFH FD, € 710,-

STANDARD



OPTION



Model	Measuring range [Max] N	Division [d] N	Scope of delivery	Price excl. of VAT ex works €	Option DAKKS Calibration Certificate					
					Tensile Force		Compressive Force		Tensile/Compressive Force	
SAUTER					DAKKS KERN	€	DAKKS KERN	€	DAKKS KERN	€
FH 500S71	500	0,1	1× FH 500 1× AE 500	710,-	963-161	187,-	963-261	187,-	963-361	340,-
TVL 500FHS71	500	0,1	1× TVL 1× FH 500 2× AE 500	1380,-	963-161	187,-	963-261	187,-	963-361	340,-





Robust premium test stand for laboratory applications

Features

- Motorised test stand for tension/compression force measurements
- Table-top design for comfortable operation
- Robust design for durable use
- Easy-to-access safety switch-off
- Upper and lower end point of the traverse distance can be set individually
- Automatic or manual operation mode
- **1** Suitable for all SAUTER force gauges up to 500 N, e.g. SAUTER FH-S, for details see page 12 (not included in delivery)

Technical data

- Maximum tensile and compressive force: 500 N
- Speed accuracy: 2 % of [Max]
- Overall dimensions W×D×H 570×428×236 mm
- Net weight approx. 28 kg



Accessories

- Digital length measuring device, measuring range 300 mm, readability 0,01 mm, details see page 39, SAUTER LB 300-2, **€ 1250,-**
- Mounting the length measuring device LB onto a SAUTER test stand at the factory, SAUTER LB-A02, **€ 210,-**
- Data transfer software with graphic display of the measurement process, force-time, SAUTER AFH FAST, **€ 115,-**  
Force-displacement only in combination with SAUTER LB, SAUTER AFH FD, **€ 710,-**

STANDARD



OPTION



Model	Measuring range	Speed range	Maximum travel distance	Price excl. of VAT ex works €
	[Max] N	mm/min	mm	
SAUTER TVO 500N300	500	15 – 300	270	2500,-



**Premium test stand in table-top version – with precise step motor  
– also available as a set**




Solid and flexible fixing options for many clamps and accessories from the SAUTER product range, see *accessories*



A wide range of application possibilities because of its large travelling distance



Interface for data transmission from the SAUTER FH measuring device and for controlling the test stand with SAUTER AFH software

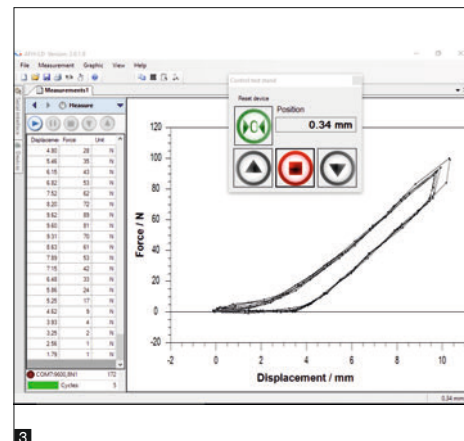

## Features

- Motorised test stand for tension/compression force measurements. **1** Also available as a practical set TVO-LD for force-displacement-measurements in laboratory and industry
- Stepper motor for greatest ease of use
  - for constant speed from the smallest to the maximum load
  - allows testing at minimum speed and full load
  - for higher positioning accuracy. Precise starting and stopping, without overrun, even at high speeds
  - precise adjustment of the displacement speed using the information shown on the display
- Automatic or manual operation mode
- **2** Premium operating panel:
  - Digital speed display
  - Digital repeat function display
  - Control of the test stand using PC software SAUTER AFH **3**
- Table-top design for comfortable operation
- Robust construction
- Fixation of SAUTER force measuring devices up to 2 kN possible

## 1 SAUTER TVO-LD

- Five in one – motorised test stand, length measuring system LD, interface cable, data transfer software AFH LD, interface converter AFH 12 and mounting
- With linear potentiometer for length measurement to create force-displacement diagrams on PC, maximum measuring range 300 mm/ 500 mm/700 mm, readability 0,01 mm, measuring accuracy 0.5 % of [Max], USB-A cable 1,5 m, high data acquisition speed

## Technical data

- Speed accuracy: 0,5 % of [Max]
- Positioning accuracy when shutting down: ± 0,05 mm

## Accessories

- Only TVO-S: Data transfer software with graphic display of the measurement process, force-time, SAUTER AFH FAST, € 115,-

STANDARD				OPTION	
TVO-LD	TVO-LD			TVO	

Model	Measuring range	Speed range	Maximum travel distance	Price excl. of VAT ex works €
	[Max] N	[Max] mm/min	mm	
<b>SAUTER</b>				
<b>TVO 500N500S</b>	500	1 – 500	270	<b>3950,-</b>
<b>TVO 1000N500S</b>	1000	1 – 500	500	<b>4090,-</b>
<b>TVO 2000N500S</b>	2000	1 – 500	700	<b>5800,-</b>
Sets incl. test stand, length measuring system, interface cable, software AFH LD, assembly:				
<b>TVO 500N500S-LD</b>	500	1 – 500	270	<b>5050,-</b>
<b>TVO 1000N500S-LD</b>	1000	1 – 500	500	<b>5250,-</b>
<b>TVO 2000N500S-LD</b>	2000	1 – 500	700	<b>6980,-</b>




Motorised test stand incl. length measuring device LB

## Test stand with electric motor for standard measurements – also available as a set




Premium operating panel


- Digital speed display
- Digital repeat function

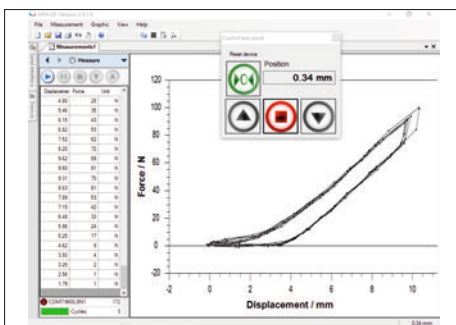

Control of the test stand using PC software  
SAUTER AFH

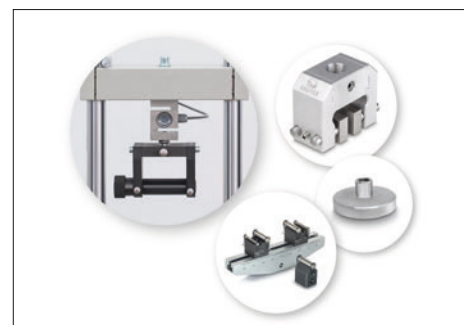

Solid and flexible fixing options for many clamps and accessories from the SAUTER product range, see *accessories*

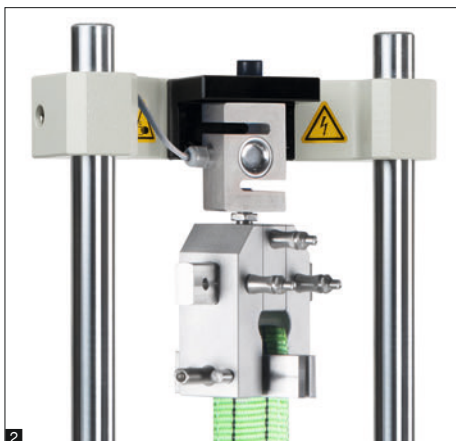

## Features

- Motorised test stand for tension/compression force measurements. Also available as a practical set for force-displacement-measurements in laboratory and industry
- Force controlled automatic switchoff, teststop after achieving an adjusted limit load, only in connection with a SAUTER FH force gauge
- Maximum displacement protected by electronic end switches
- Particularly flexible mounting options for variable force SAUTER measuring devices, such as, FC, FH, FK, FL
  - **1** Direct mounting of measuring devices with internal load cell up to a measuring range of 500 N (only for TVM 5000N230N)
  - **2** Direct mounting of the external load cell on the traverse, starting with 1000 N measurement range and higher
  - **3** Holder for force measuring devices of the SAUTER FH range with external load cell

## SAUTER TVM-N/TVM-NL

- SAUTER LA length measuring device as standard, to read the travel distance with a readability of 0,01 mm

## SAUTER TVM-LB

- Five in one – motorised test stand, digital length measuring device LB, interface cable, data transfer software AFH FD, two interface converters AFH 12 and mounting
- With digital length measuring device LB for creating force-displacement diagrams on the PC, maximum measuring range 300 mm, readability 0,01 mm, for details see page 39

## Technical data

- Maximum travel distance: 210 mm
- Speed accuracy: 3 % of [Max]

## Accessories

- Only TVM: Data transfer software with graphic display of the measurement process, force-time, SAUTER AFH FAST, € 115,-
- **3** Holder for force measuring devices of the SAUTER FH range with external load cell, SAUTER TVM-A01, € 95,-

### STANDARD




### OPTION



Model	Measuring range	Speed range	Length of columns	Price excl. of VAT ex works €
	[Max] N	[Max] mm/min	mm	
<b>SAUTER</b>				
TVM 5000N230N	5000	10 – 230	635	2740,-
TVM 5000N230NL	5000	10 – 230	1135	3230,-
TVM 10KN120N	10000	30 – 120	1135	3770,-
TVM 20KN120N	20000	30 – 120	1135	5040,-
Sets incl. test stand, length measuring device, interface cable, software AFH FD, assembly:				
TVM 5000N230N-LB*	5000	10 – 230	635	4880,-
TVM 5000N230NL-LB*	5000	10 – 230	1135	5350,-
TVM 10KN120N-LB*	10000	30 – 120	1135	5880,-
TVM 20KN120N-LB*	20000	30 – 120	1135	7100,-

**1** \* ONLY WHILE STOCKS LAST



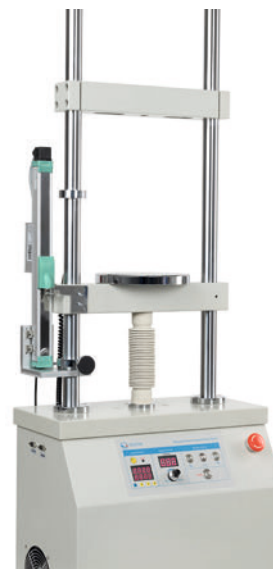


Motorised test stand incl. length measuring system LD

## Premium test stand with step motor for precise testing up to 50 kN – also available as a set




Premium operating panel


- Digital speed display for a direct reading of the displacement speed
- Digital repeat function for long-term stress test

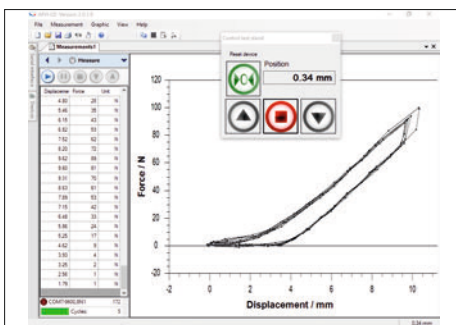

Control of the test stand using PC software SAUTER AFH

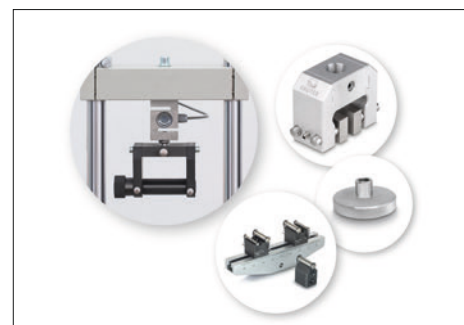

Solid and flexible fixing options for many clamps and accessories from the SAUTER product range, see *accessories*

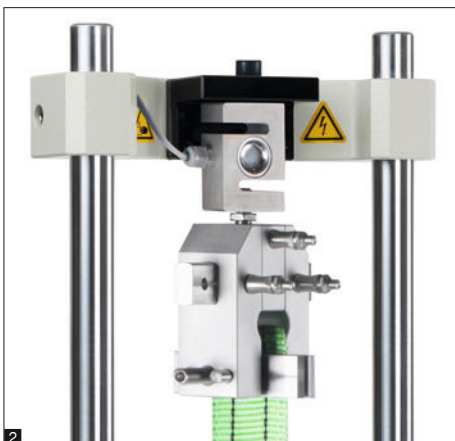

## Features

- Motorised test stand for tension/compression force measurements. Also available as a practical set TVS-LD for force-displacement-measurements in laboratory and industry
- Stepper motor for greatest ease of use
  - for constant speed from the smallest to the maximum load
  - allows testing at minimum speed and full load
  - for higher positioning accuracy. Precise starting and stopping, without overrun, even at high speeds
  - precise adjustment of the displacement speed using the information shown on the display
- Maximum displacement protected by electronic end switches
- Large working area by means of long guide columns as standard, which allows a wide range of fixing options

- Particularly flexible mounting options for variable force measuring devices, such as, for example, SAUTER FC, FH, FK, FL:
  - **1** Direct mounting of measuring devices with internal load cell up to a measuring range of 500 N (only for TVS 5000N240)
  - **2** Direct mounting of the external load cell on the traverse, starting with 1000 N measurement range and higher
  - **3** Holder for force measuring devices of the SAUTER FH range with external load cell
- Only TVS: SAUTER LA length measuring device as standard, to read the travel distance with a readability of 0,01 mm

## Technical data

- Maximum travel distance: 210 mm
- Speed accuracy: 1 % of [Max]
- Positioning accuracy when shutting down: ± 0,05 mm

## Accessories

- Only TVS: Data transfer software with graphic display of the measurement process, force-time, SAUTER AFH FAST, € 115,-
- **3** Holder for force measuring devices of the SAUTER FH range with external load cell, SAUTER TVM-A01, € 95,-

## SAUTER TVS-LD

- Five in one – premium motorised test stand, length measuring system LD, interface cable, data transfer software AFH LD, interface converter AFH 12 and mounting
- With linear potentiometer for length measurement to create force-displacement diagrams on PC, maximum measuring range 300 mm, readability 0,01 mm, measuring accuracy 0.5 % of [Max], USB-A cable 1,5 m, high data acquisition speed

STANDARD				OPTION	
SCALE	SOFTWARE	STEPPER	2 DAYS	SOFTWARE	
TVS-LD				TVS	

Model	Measuring range	Speed range	Length of columns	Price excl. of VAT ex works €
	[Max] N	[Max] mm/min	mm	
<b>SAUTER</b>				
TVS 5000N240	5000	1 - 240	1135	5650,-
TVS 10KN100	10000	1 - 200	1135	7200,-
TVS 20KN100	20000	1 - 70	1135	7300,-
TVS 50KN80	50000	1 - 70	1135	10400,-
Sets incl. test stand, length measuring system, interface cable, software AFH LD, assembly:				
TVS 5000N240-LD	5000	1 - 240	1135	6590,-
TVS 10KN100-LD	10000	1 - 200	1135	8150,-
TVS 20KN100-LD	20000	1 - 70	1135	8250,-
TVS 50KN80-LD	50000	1 - 70	1135	11290,-



Manual test stand for tensile and compressive testing of springs, medium version up to 100 N

Características

- Spring tester for tension and compression tests
- Measuring device integrated in housing
- **1** Integrated thermal printer
- Digital length measuring unit SAUTER LA as standard:
  - Manual zero adjustment possible
  - Pre-length can be set manually
  - Readability: 0,01 mm
- 10 memories to print out the results or to calculate average values
- Measuring with tolerance range (limit-setting function): Upper and lower limit adjustable, in pull and push direction. The process is supported by an audible and visual signal
- Peak load display (peak hold)
- Selectable measuring units: N, lbf, kgf

Datos técnicos

- Measuring precision: 0,5 % of [Max]
- Maximum stroke length: 100 mm
- Maximum work zone: 100 mm
- Overall dimensions W×D×H 235×300×620 mm
- Net weight approx. 22 kg

STANDARD

PEAK

PUSH/PULL

SCALE

STATISTIC

PRINT

TOL

ZERO

FAST-MOVE

2 DAYS

OPTION

ISO  
+4 DAYS

Model	Measuring range [Max] N	Division  [d] N	Price excl. of VAT ex works €	Option	
				Factory calibration certificate	
				KERN	€
SAUTER					
SD 50N100	50	0,01	2520,-	961-2610	198,-
SD 100N100	100	0,02	2520,-	961-2610	198,-

**1** ONLY WHILE STOCKS LAST

# FASTENERS & ACCESSORIES

It is often the little details that make a crucial difference. Fasteners such as clamps and brackets are small but essential connecting elements between measuring devices and test benches or workpieces. Precise and reproducible measurements would not be possible without them.


In addition to a wide selection of fasteners, SAUTER also offers suitable accessories to provide you with the ideal support for your measurements. Whether standard or customised solutions, our range has everything you need for precise and efficient measuring.

Our experts are at your side with their specialised knowledge to help you select the best components for your measuring systems.




We will be happy to advise you:  
Tel. +49 7433 9933-562  
[info.sauter@kern-sohn.com](mailto:info.sauter@kern-sohn.com)


## Accessories

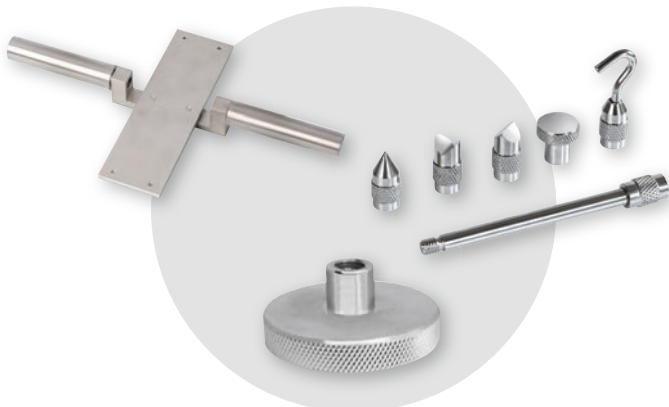

## Jaws

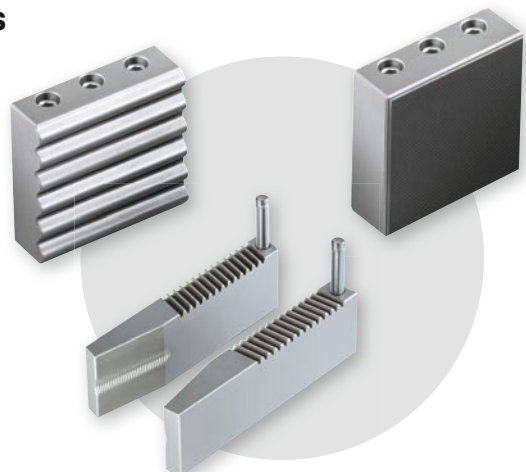

## Clamps

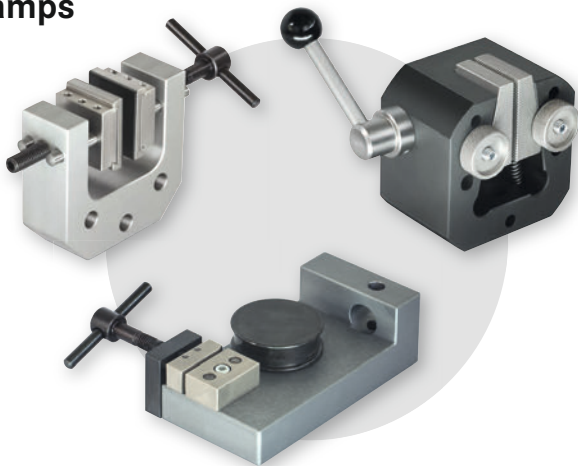

## Connection adapters





You can find the full range of clamps & brackets as well as the entire assortment of accessories with many other parts on our website [www.kern-sohn.com](http://www.kern-sohn.com)

Or you can simply scan the code for detailed information, technical data and prices.



1

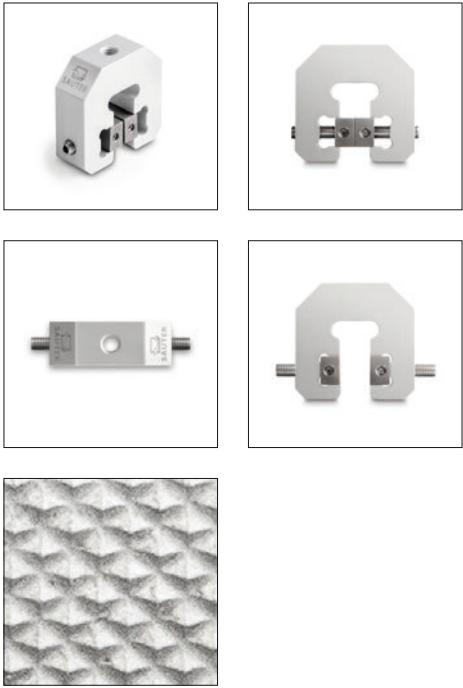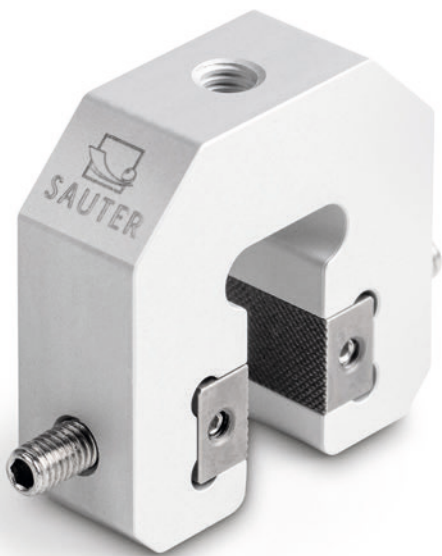

Quickly fittable universal screw tension clamp for tension and compression testing for a force range up to 500 N

Features

- High-quality screw tension clamp in the lower force range with an enormous flexibility for a fast adaptation to a wide variety of test objects
- Solid version for high clamp forces
- Flexible clamping width (width between the jaws) from 0 – 10 mm
- Jaws with pyramid grip as standard, W×H 15×10 mm
- The modular construction enables a quick adaptation and cleaning of the clamp
- The threaded rods with hexagon socket allow the test objects to be securely clamped with standard tools and thus adapted to the user's own requirements and operating conditions, e.g. use with a test stand or measuring device, etc.
- Can be used with all SAUTER force measuring devices or test stand systems
- To fix the clamp on a force gauge, there is a M6 thread on the upper side of the clamp
- Scope of supply: 1 clamp with 2 jaws with pyramid-shaped grip

Technical data


- For tension and compression testing up to 500 N
- Overload protection: 150 % of [Max]
- Overall dimensions W×D×H 51×41×15 mm
- Net weight approx. 0,10 kg

STANDARD



Model	Measuring range	Price excl. of VAT ex works €
SAUTER	[Max] N	
AE 500	500	195,-



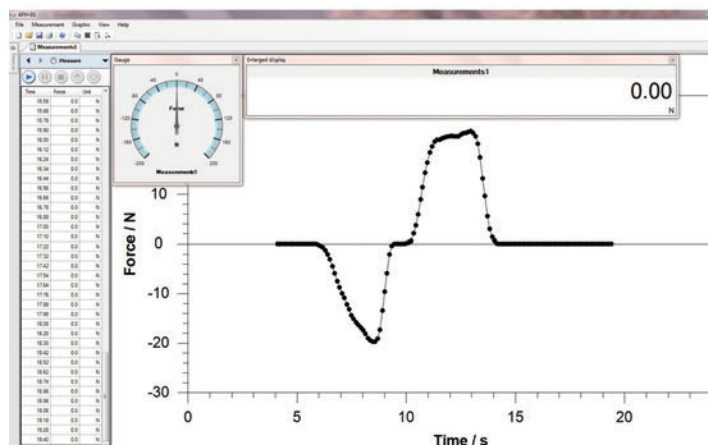

	id	name	last	order	update	inserted	orderInsertMass	timestamp
1	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
2	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
3	4.813090204	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
4	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
5	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
6	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
7	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
8	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
9	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
10	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
11	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
12	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
13	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
14	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
15	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
16	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
17	3.789123	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
18	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
19	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
20	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
21	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
22	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
23	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
24	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
25	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
26	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
27	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
28	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
29	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
30	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
31	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
32	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
33	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
34	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
35	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
36	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
37	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
38	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
39	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	
40	4.813090188	0	N	FW 200	NaN	NaN	2013-11-07T13:51:26.09752524+00	



## Data transfer software for force-time-measurements

## Features

- Force measurements can be conducted over a very short period, i.e. seconds
- A high speed data transfer to a PC is possible (with a transfer of up to 20 data sets per second) when combining the AFH FAST with SAUTER FH, FC or FL
- AFH FAST shows the results in a Force-Time-Graph and can export the data to Microsoft Excel®
- Compatible with the following operating system: Microsoft Windows 10®

## Technical data

- Data recording rate approx. 20 measurements per second with SAUTER FH, FC, FL, DA and DB

## Accessories

- **1** RS-232/USB adapter, to connect peripheral devices with USB connection, SAUTER AFH 12, **€ 95,-**
- RS-232/Ethernet adapter for connection to an IP-based Ethernet network, KERN YKI-01, **€ 380,-**

STANDARD




## Model

Price  
excl. of VAT  
ex works  
€

SAUTER

## AFH FAST

**115,-**

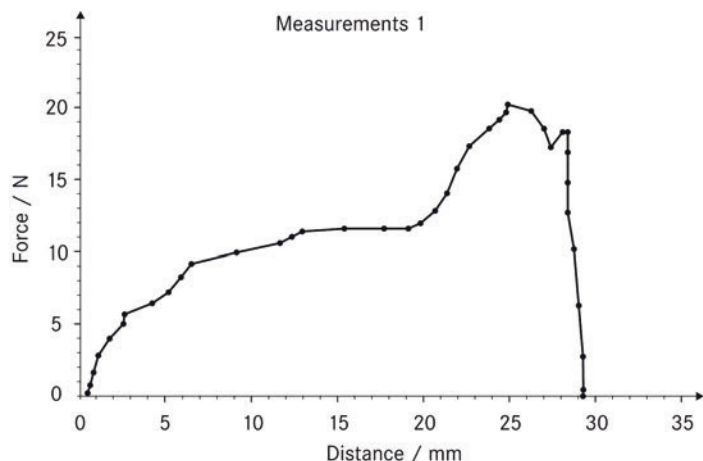

## Data transfer software for force-displacement-measurements

### Features

- AFH FD/AFH LD software is designed for all applications that require the measurement of forces, depending on the displacement. Typically these are force progression graphs in penetration tests or pullout tests
- The program simultaneously requests the measurements from a force measuring device, e.g. SAUTER FH, as well as a length measuring device, e.g. SAUTER LB or SAUTER LD **1**, **2**
- The measurements from both instruments are transferred continuously to the PC, synchronised by the AFH FD/AFH LD software and exported in the form of a graphic, as well as free data format for simple processing in Microsoft Excel®
- The software AFH FD is compatible with all instruments of series SAUTER FC, FH, FL
- The software AFH LD is compatible with all instruments of series SAUTER FC, FH, FL, FS
- These measuring instruments are usually used with SAUTER test stands, in particular those from the SAUTER TVM-N and TVS range. However, it is also possible to use them with mechanical testing machines

- Further analysis functions:
    - Extension of the test object
    - Tensile and compressive force
    - Endurance testing
    - Archiving the recorded data
  - Scope of delivery for SAUTER AFH FD/AFH LD:
    - Software AFH FD/AFH LD as download
    - User manual
    - AFH FD: RS-232 interface cable for LB (LB-A01)
  - Compatible with the following operating system: Microsoft Windows 10, 11®
  - **3** Order example for a complete test system:
    - FH 5K (Digital force gauge)
    - LB 300-2 (Digital length measuring device)
    - AFH FD (Force-distance evaluation software)
    - TVM 5000N230N\* (Test stand)
    - LB-A02\* (Mounting LB on test stands)
    - 2× AFH 12 (RS-232/USB adapter)
    - AC 04\* (Test object holder)
    - 963-163\* (Force calibration)
    - 961-150\* (Length calibration)
- \* not necessarily required for operating the AFH FD software

### Technical data

- Data recording rate max. 3 Hz (specially in combination with SAUTER FH and SAUTER LB)
- Data recording rate max. 25 Hz (in combination with SAUTER LD, dependent on measuring instrument)

### Accessories

- Interface cable RS-232 (for SAUTER LB), SAUTER LB-A01, **€ 390,-**
- RS-232/USB adapter, to connect peripheral devices with USB connection, SAUTER AFH 12, **€ 95,-**

STANDARD



Model	Price excl. of VAT ex works €
<b>SAUTER</b>	
<b>AFH FD</b>	<b>710,-</b>
<b>AFH LD</b>	<b>270,-</b>

### SAUTER AFH LD

- Force-displacement software, but only in combination with a length measuring device of SAUTER LD series

Nr.	Messwert	Einheit	Richtung	Material	Datum	Zeit
6	001-1/0	182 Hk	0	Steel&Cast Steel	11. Mai	21:40
7	001-2/0	600 Hk	0	Steel&Cast Steel	11. Mai	21:40
8	001-3/0	543 Hk	0	Steel&Cast Steel	11. Mai	21:40
9	001-4/0	543 Hk	0	Steel&Cast Steel	11. Mai	21:40
10	001-5/0	480 Hk	0	Steel&Cast Steel	11. Mai	21:40
11	002-4/0	429 Hk	0	Steel&Cast Steel	11. Mai	21:40
12	002-1/0	600 Hk	0	Steel&Cast Steel	11. Mai	21:40
13	002-2/0	597 Hk	0	Steel&Cast Steel	11. Mai	21:40
14	002-3/0	647 Hk	0	Steel&Cast Steel	11. Mai	21:40
15	002-4/0	596 Hk	0	Steel&Cast Steel	11. Mai	21:40
16	002-5/0	595 Hk	0	Steel&Cast Steel	11. Mai	21:40
17	002-4/0	629 Hk	0	Steel&Cast Steel	11. Mai	21:40
18	003-1/0	595 Hk	0	Steel&Cast Steel	11. Mai	21:40
19	003-2/0	599 Hk	0	Steel&Cast Steel	11. Mai	21:40
20	003-3/0	596 Hk	0	Steel&Cast Steel	11. Mai	21:40
21	003-4/0	603 Hk	0	Steel&Cast Steel	11. Mai	21:40
22	003-5/0	592 Hk	0	Steel&Cast Steel	11. Mai	21:40
23	003-6/0	590 Hk	0	Steel&Cast Steel	11. Mai	21:40
24	004-1/0	609 Hk	0	Steel&Cast Steel	12. Mai	21:43
25	004-2/0	592 Hk	40	Steel&Cast Steel	12. Mai	21:44

## Plug-In for data transfer of measuring data from the measuring instrument and transfer to a PC, e.g. in Microsoft Excel®

### Features

- Ideal for transferring measuring data from the internal data memory of the measuring instrument to Microsoft Excel®
- Solution: SAUTER AFI-2.0 plug-in for Microsoft Excel®. By doing this, an installation and learning yet another software can be avoided
- Compatible with Microsoft Excel® 2013 et seq.
- Easy handling: The measuring instrument is connected to the PC. At the push of a button, the SAUTER AFI-2.0 plug-in scans all the existing serial interfaces on the PC, finds the relevant measuring instrument and then reads the measuring data memory

### Technical data

- Suitable for the following ranges: SAUTER FL, FS, DA, DB, HN-D, HK-D, HK-DB, SW

### Accessories

- RS-232/Ethernet adapter for connection to an IP-based Ethernet network, KERN YKI-01, **€ 380,-**
- USB/PC connection cable (USB-A/USB mini), SAUTER FL-A01, **€ 50,-**
- More details as well as free download possible in the download area of the webshop

STANDARD



## The oldest Precision Balance Factory in Germany

### SAUTER GmbH

c/o KERN & SOHN GmbH

Ziegelei 1  
72336 Balingen  
Germany  
Tel. +49 7433 9933-0  
info@sauter.eu  
www.kern-sohn.com

### Discover the multifaceted World of Balances and Measuring Technology from SAUTER online: [www.kern-sohn.com](http://www.kern-sohn.com)

- Full KERN & SAUTER Product Range
- Convenient 24/7 Ordering
- Selection of more than 5,000 Items across Weighing and Measuring Technology, Optical Instruments as well as Accessories and Services
- Extensive Information and useful Download Options
- Technical Product Data Sheets
- Operating Instructions
- Descriptive Image and Video Material
- Useful KERN Services
- Technical Glossary
- KERN Dealer Portal
- Practical Filter and Search Functions



Follow us on our social media  
channels too



Printed in Germany by SAUTER GmbH  
zcs-en-kp-20251



CONFORMITY  
ASSESSMENT  
ACCORDING TO  
NAWID:  
2014/31/EU

