

KERN UFN 1.5T0.5IPM



Pallet scale with stainless steel load support (IP67) and stainless steel display device (IP65), verification optional



Display backlight	✓
Display digit height	52 mm
Languages of the user interface	Symbol language

Construction

Dimension display device (W×D×H)	266×165×96 mm
Dimensions weighing surface (W×D)	1190×840 mm
Dimensions weighing surface	1190×840 mm
Dimensions weighing platform (W×D×H)	1360×840×90 mm
Material weighing plate	stainless steel
Material platform	stainless steel (SUS304)
Material display housing	stainless steel
Material load cell(s)	alloyed steel
Level indicator	✓
Levelling feet adjustable	✓
Stand inclinable	✓
Wall mount	✓
Cable length	5 m
Display device cable length	5 m
Allowed cable length display device [Max]	30 m

Platform Construction	Welded load plate; smooth surface
Load cells - number	4

Functions

Sum memory function	✓
Recipe/summing level	Sum A
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual
Function for averaging under unstable weighing conditions	✓
Counting function	✓
Reference quantity	10, 20, 50, 100, 200
IP protection - display	IP65
IP protection - load cell	IP67
Auto-off interval(s) in battery mode/rechargeable battery mode	selectable
Auto-off interval(s) in mains power mode	selectable
Tare function	manual (single & multi)
Number of keys for operation	7

Category

Brand	KERN
Product category	Industrial scale
Product group	Pallet scale
Product family	UFN

Measuring System

Construction type of the scale	Single-range balance
Weighing system	Strain gauge
Weighing capacity [Max]	1500 kg
Readability [d]	0,5 kg
Reproducibility	0,5 kg
Linearity	± 0,5 kg
Minimum weight [Min]	10 kg
Resolution	3.000
Tare range	-1500 kg

Adjustment options	Adjusting with external weight
Recommended adjusting weight	1500 kg (M1)
Stabilization time	3 s
Warm-up time	10 min
Eccentric loading at 1/3 [Max]	0,5 kg
Default unit	kg
Units	kg
Units (if device is conformity assessed)	kg
Loadcell type	ZEMIC H8C 1 ton
Load cell connection	4-wire

Display

Display type	LCD
Display type	LCD with backlight

KERN UFN 1.5T0.5IPM



Pallet scale with stainless steel load support (IP67) and stainless steel display device (IP65), verification optional

Interface

Interfaces	RS-232 (optional, factory) Bluetooth BTC (v2.0) (optional, factory) analogue (0 - 10 V) (optional, factory) analogue (4 - 20 mA) (optional, factory)
EasyTouch (ET) - Connection type	RS232 (+optionale Schnittstellen)

Power Supply

Supplied power supply	Accu & Power supply
Plug-in power supply type	Power adapter
Plug-in power supply / adapter for countries - included with the delivery	EURO UK US CH
Plug-in power supply / adapter for countries - optional	EURO CH
Input voltage power supply / power [Max]	110 V - 230 V AC
Input voltage device / power [Max]	12 V, 500 mA
Battery / accumulator type	Pb
Battery connection	Plug-in terminals
Rechargeable battery operating time - backlight on	20 h
Rechargeable battery operating time - backlight off	35 h
Rechargeable battery charging time	10 h

Environmental conditions

Ambient temperature [Min]	-10 °C
Ambient temperature [Max]	40 °C
Humidity of environment [Min]	10 %
Humidity of environment [Max]	95 %

Approval

CE mark	✓
Conformity assessment possible ex works	✓
Accuracy classe	III
Verification scale interval [e]	0,5 kg

Services (optional)

Article number for adjustment at the location of installation	961-250
---	---------

Article number for conformity assessment	965-230
--	---------

Article number for DAkkS calibration	963-130
--------------------------------------	---------


Article number for certificate of conformity (verification)	969-517
---	---------

Packing & Shipping

Delivery time	2 d
Dimensions packaging (W×D×H)	1410×910×210 mm
Shipping method	Freight
Net weight approx.	55 kg
Gross weight approx.	85 kg
Shipping weight	85 kg

Pictograms

STANDARD

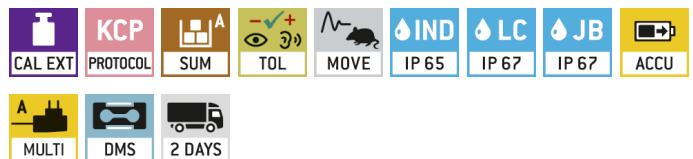

OPTION



FACTORY

