

KERN FH 20K



Universal digital force gauge for tensile and compressive force measurements with external load cell



Category

Brand	Sauter
Product category	Force measurement
Product group	Digital force gauge (external measuring cell)
Product family	FH-M

Measuring System

Measuring range force [Max] (N)	20 kN
Readability force [d] (N)	10 N
Measuring head measuring frequency	2 kHz
Overload protection (% of [Max])	150%
Default unit	kN
Internal data memory: Number of individual values	10
Internal data memory: Number of value groups	1
Tolerance (% of [Max])	0,5%
Directions of force	tension compression

Display

Display type	LCD
Screen reversible	✓

Construction

Dimension housing (W×D×H)	80×55×30 mm
Dimensions completely mounted (W×D×H)	180×55×30 mm
Dimension display device (W×D×H)	240×70×40 mm
Material housing	plastic

Material display housing	Plastics
Cable length	3 m
Mounting - force dissipation	Threaded hole M12
Mounting - force application	Threaded hole M12
Load support (tensile force)	Rod end

Functions

Function for averaging	✓
Limit-setting function	✓
Peak function	✓
Memory function	✓
Statistic function	✓
Auto-off interval(s) in battery mode/rechargeable battery mode	1 - 60 min

Interface

Interfaces	RS-232 standard USB-Device
------------	-------------------------------

Power Supply

Supplied power supply	Accu & Power supply
Plug-in power supply type	Power adapter
Plug-in power supply / adapter for countries - optional	EURO AUS UK US CH
Input voltage power supply / power [Max]	100 V - 240 V
Input voltage device / power [Max]	5 V 1000 mA
Battery / accumulator type	NiMH
Battery connection	2-pole tub connector
Rechargeable battery operating time - backlight on	24 h
Rechargeable battery operating time - backlight off	40 h
Rechargeable battery charging time	120 min

Environmental conditions

Ambient temperature [Min]	10 °C
Ambient temperature [Max]	40 °C
Storage temperature [Min]	-10 °C
Storage temperature [Max]	40 °C

Approval

CE mark	✓
---------	---

KERN FH 20K



Universal digital force gauge for tensile and compressive force measurements with external load cell

Services (optional)


Article number for factory calibration (tensile force)	961-164
Article number for factory calibration (compressive force)	961-264
Article number for factory calibration (tensile force/ compressive force)	961-364

Packing & Shipping

Delivery time	1 d
Dimensions packaging (W×D×H)	360×240×170 mm
Shipping method	Parcel service
Net weight approx.	1,6 kg
Gross weight approx.	3,0 kg
Shipping weight	2,9 kg

Pictograms

STANDARD

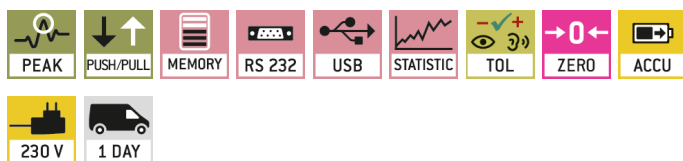

OPTION

